

PRODUCT: Liquid Flocculant

EDITION: February 2008

REVISION: 3 – February 2015

SPECIFICACIONES

CHARACTERISTICS	VALUE	UNITS	METHOD*
Richness (as Al ₂ O ₃)	9,0 min.	% p/p	DS01PF02.3100

⁽¹⁾ The Company's internal procedures are based party or fully on analytical reference methods (ISO, ASTM).**TYPICAL VALUE**

Aspect	Transparent or slightly yellowish liquid
Density at 20°C	1,19 – 1,23

OTHERS**Applications :**

Product for the flocculation of impurities and of water cloudiness, thereby improving it's transparency. **NOT TO USE IN DIATOM FILTERS.**

Treatment :


Depending on the water turbidity add between 250 cm³ - 1,5 liters of product by each 100 m³ of water. Can be added to the pool or to the piping line leak, before the filter.

For further information, please refer to the material safety data sheet.

USUAL PACKAGING

As per customer order.

APPROVED BY QUALITY FACTORY

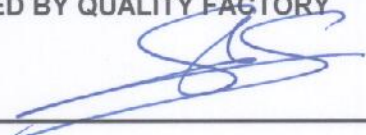

APPROVED BY COMMERCIAL MANAGEMENT

